

# FIBER MANAGEMENT SYSTEM – 24 Fibers

**Product Description** : Rack Mount Sliding-FMS-1U

## Product Specifications

Access	: Front
Adapter Mounting	: 24/48 Adapters / plate
Number of Cable entry	: 4 No's
Cable entry & patch cord	
Outlet glands	: Grommet/ PG 21 Glands provision provided
Cable Mounting	: Horizontal
Capacity	: 24 Fibers/ 48 Fibers (DX LC)
Dimensions (W x H x D)	: 485 mm X 45 X 301 mm
Finish	: Chromium plated & Polyester Powder coated (80 – 100 μ)
Material	: CRCA – 1.2 mm thick
Max. Capacity	: 48 Fibers (DX LC)
Patch cord Outlet	: From Front (LHS & RHS)
Type of Systems	: Rack Mount type
Compatible with	: SC, FC, ST, LC. (As Per Customer Requirement)


## ADAPTERS & PIGTAILS:

Adapter Parameters	: FC-PC/SC-PC/ LC-PC 0.01dB (SM-SX)
Pigtail Parameters	: FC-PC/SC-PC/ LC-PC 1.5 Mts G.657A IL <0.20dB
Types	: FC-PC/SC-PC/ LC-PC (SM-SX)

## SPLICE TRAY (X1):

Capacity	: 24 Fibers
Colour	: RAL 7035 Grey
Dimension	: 200 mm x 128 mm x 18 mm
Material	: ABS
Max. Number	: 1
Type	: Hinged type; Stackable with lock

# FIBER MANAGEMENT SYSTEM – 24 Fibers

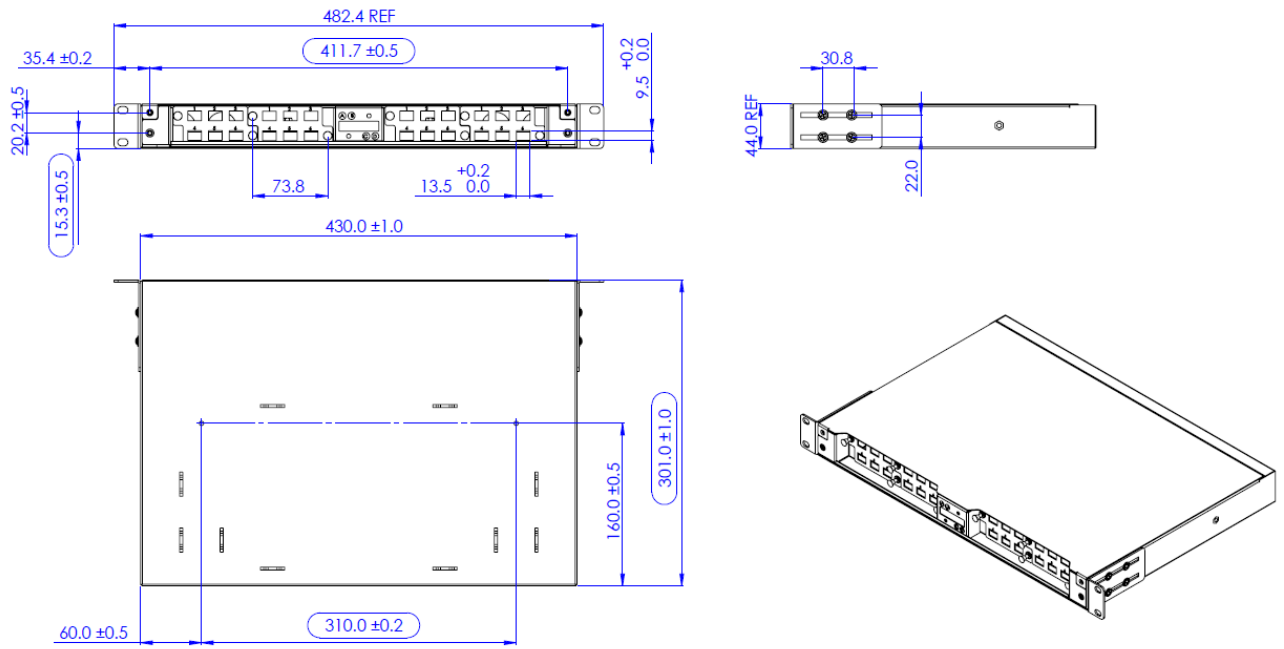

## PRODUCT PICTURES

